
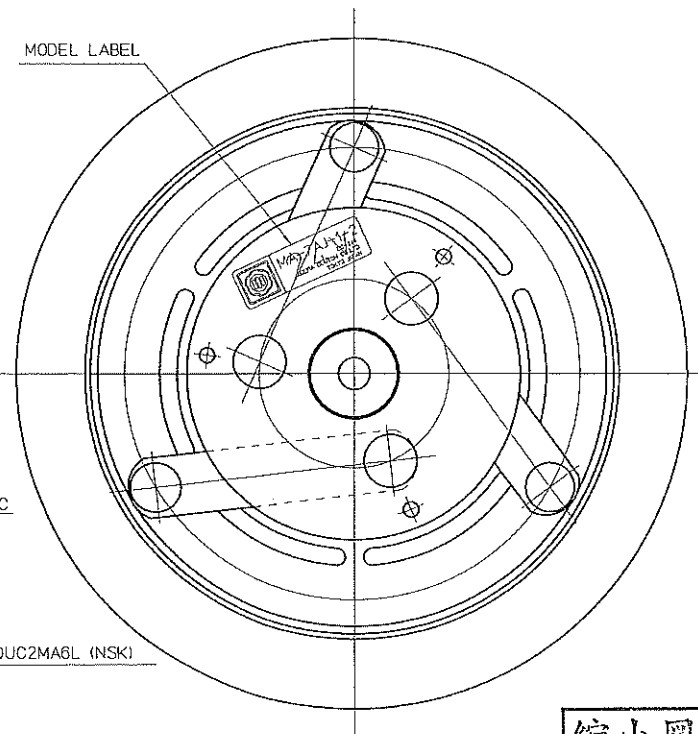


REV	REVISION STATUS	NOTE	DATE	CHK	BY	BY
6	Eliminate cover from assembly.	(1) 9 Others	Jun 09	M.A.	Y.H.	
3	Correction (2V → 24V)	(1) 4 Be executed	Nov 12	Y.A.	T.Y.	
9	DELETE VOLTAGE LABEL, etc	(3) 9 Others	Feb 09	Y.A.	R.I.	

納入仕様書図番 50200000A07

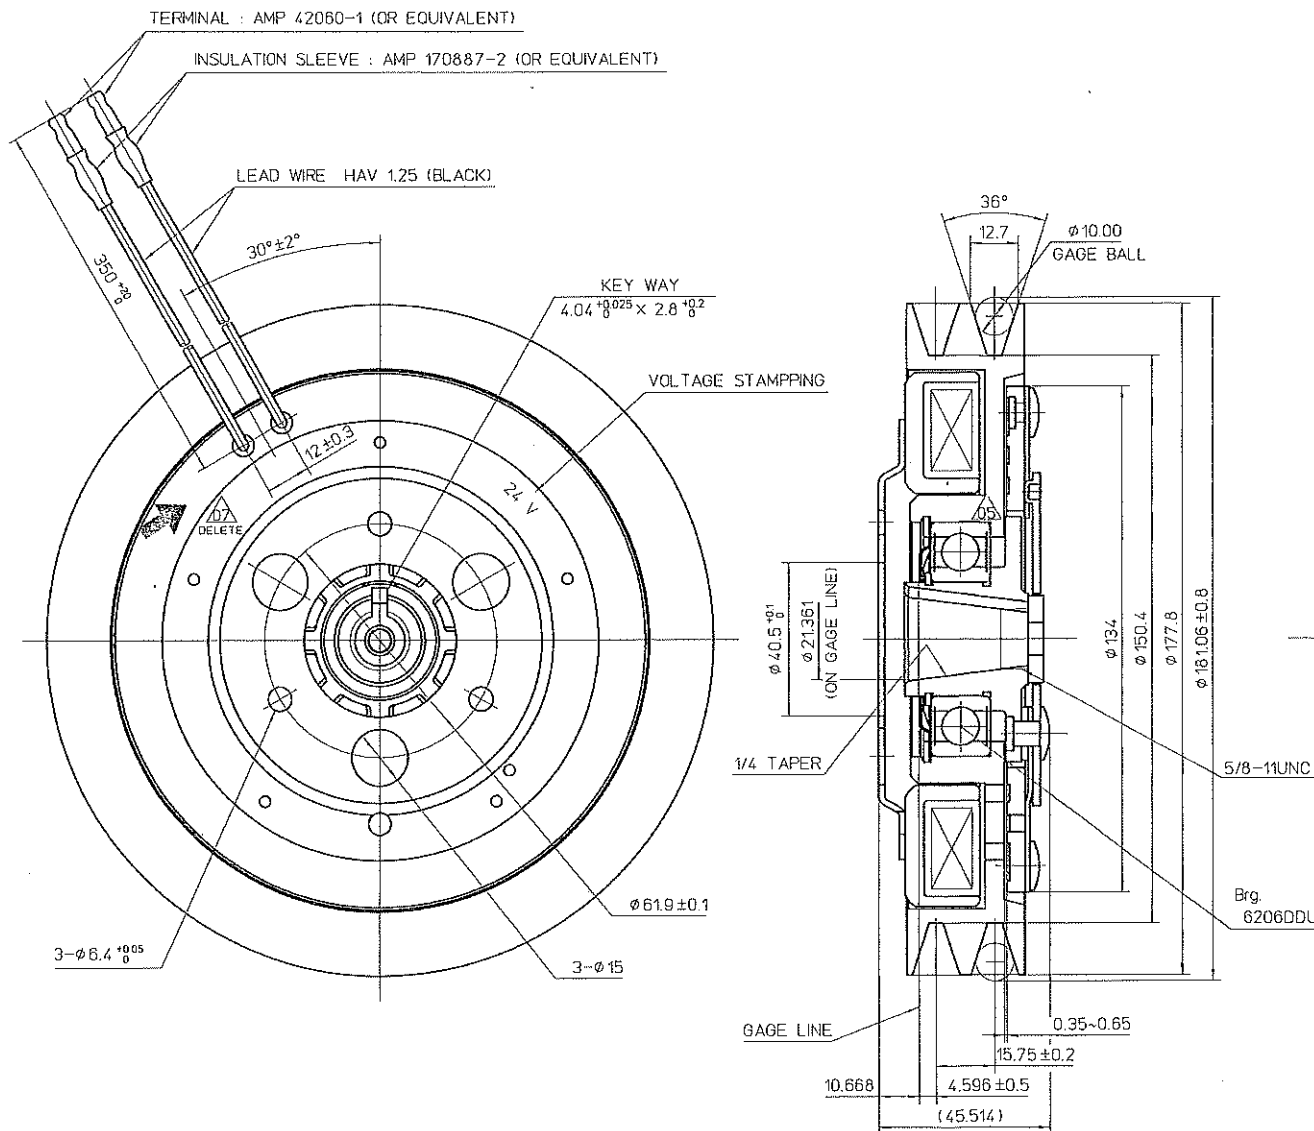

縮小図
変更図

SPECIFICATIONS

1. EXCITING VOLTAGE : D.C. 24 V
2. STATIC TORQUE
INITIAL : 39 N·m (4.0 kgfm)
AFTER BURNISHING : 101 N·m (10 kgfm)
3. POWER CONSUMPTION : MAX. 45.6 W
4. ROTATION : C.W.
5. WEIGHT :

NOTES

SURFACE TREATMENT :
BLACK PAINTING (CATHODIC ELECTRO-DEPOSITION)
EXCEPT FOLLOWING PARTS
FRICTION SURFACE
RIVET (MFZn2-B)
HUB INNER DIA.
FIELD CORE COIL ASSY (MFZn3)

SURFACE ROUGHNESS UNLESS OTHERWISE SPECIFIED	GENERAL TOLERANCE FOR GLASS 11	WORKING PROCESS	APPD E.Moejima	DATE May 26 '93	SIZE A2
▽ 50S	RANGE 0.5 10	TOL. 6 ± 0.1	CHKD T. Ishimaru	DATE May 26 '93	SCALE 1
▽ 25S	5 30 ± 0.2	MATERIAL	CHKD H. Yoshimaru	DATE May 26 '93	1
▽ 6S	30 120 ± 0.3	MATERIAL	DWN R. Sasaki	DATE May 26 '93	1
▽ 3S	120 315 ± 0.5	MATERIAL	CUSTOMER SPX FLOW TECHNOLOGY CREDRO AB		
▽ 0.8S	315 1000 ± 0.8	HEAT TRIM 0	MODEL MA-7AJ-1~2		
HISTORY 50200000	SURFACE TREAT 0	ASSY NO			
ISSUE NO	PLANT 2	PARTS CODE 5913200000	NAME MAGNETIC CLUTCH		
ISSUE DATE 2009. 2. 12		OGURA CLUTCH Co., LTD.	DWG NO 50200000		