



valvole a sfera ball valves

1560

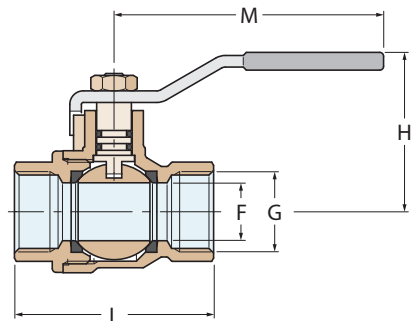

Valvola a sfera F-F passaggio totale a leva
Lever operated ball valve F-F full flow

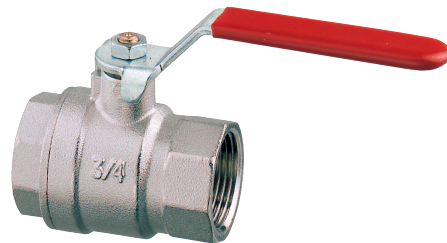

FILETTATURE / THREAD :
G = ISO 228/1 (BS 2779)

1560											
PN	50	50	50	50	40	40	32	32	16	16	16
Weight (gr)	135	120	180	260	460	740	990	1550	2880	4000	7000
M	80	80	90	90	115	115	150	150	240	240	250
H	41	41	43	46	60	64	74	82	120	127	135
L	45	45	50	59	70	81	91	108	130	150	178
F	10	10	15	20	25	32	40	50	61	74	95
G	1/4"	3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"	4"

Ottone nichelato
Nickel-plated brass