


valvole a sfera ball valves

1850

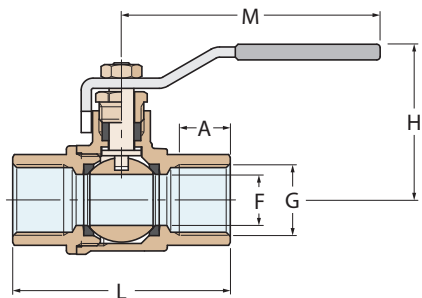

Valvola a sfera F-F passaggio totale a leva serie "2000"

Lever operated ball valve F-F - full flow
"2000" series

FILETTATURE / THREAD :
G = EN 10226/1 (BS 21)

1850	■	■	■	■	■	■	■	■	■
1851	■	■	■	■	■	■	■	■	■
PN	63	63	63	63	63	40	25	25	25
Weight (gr)	150	180	280	465	750	1375	2050	3500	5250
M	95	95	95	115	115	155	155	175	232
H	42	42	46	55	60	77	78	100	110
L	46	52	66	76	90	110	120	140	164
F	10	10	15	20	25	32	40	50	65
A	10	11.4	15	16.3	19.1	21.4	21.4	25.7	30.1
G	1/4"	3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"



Ottone nichelato
Nickel-plated brass ■

1851

Versione con leva in
acciaio inox ■
Version with lever in
stainless steel