



valvole a sfera ball valves

1900

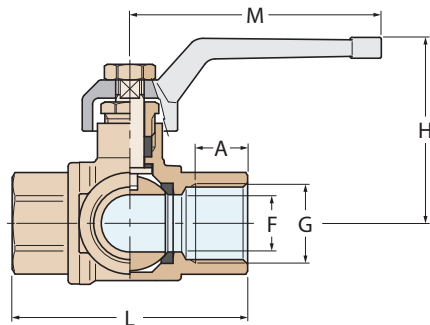

**Valvola deviatrice a tre vie passaggio totale
F-F-F - flusso a "T"**
Full flow 3 ways diverter valve "T" flow F-F-F

FILETTATURE / THREAD :
G = EN 10226/1 (BS 21)



Ottone nichelato
Nickel-plated brass

1900	■	■	■	■	■	■	■	■	■
PN	16	16	16	16	16	16	16	16	16
Weight (gr)	170	185	290	480	780	1320	1920	3100	6600
M	110	110	110	130	130	159	159	188	190
H	48	48	50	62.5	67	82	88.5	109	120
L	46	52	66	76	90	110	120	140	160
F	10	10	15	20	25	32	40	50	65
A	10	11.4	15	16.3	19.1	21.4	21.4	25.7	35
G	1/4"	3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"