


Valvola presa a mare “antiblocco” a doppia
mandata F-F-F e indicatore di posizione
Double intake “non stick” valve F-F-F
with position indicator

RINA type approval
ISO 9093:2020

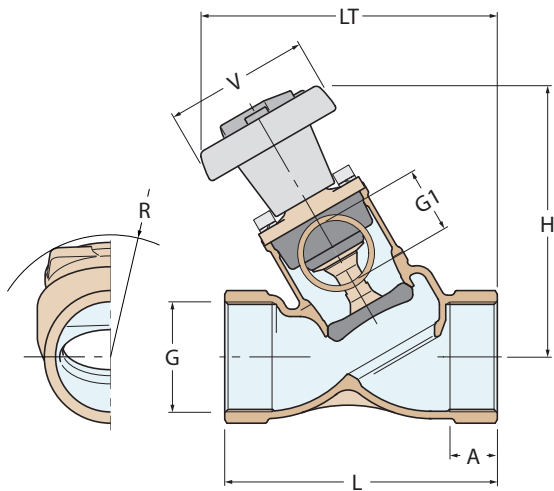


FILETTATURE / THREAD :
G - G1 = EN 10226/1 (BS 21)

2250			
Weight (gr)	7400	8250	13000
R	98	106	120
LT	244	246	291
V	125	125	160
H	233	236	274
L	195	206	245
A	30.2	33.3	35.8
G1	1"1/2	2"	2"1/2
G	2"1/2	3"	4"



Bronzo
Bronze

Diagramma portate - perdite di carico
Flow rate - loss of pressure diagram

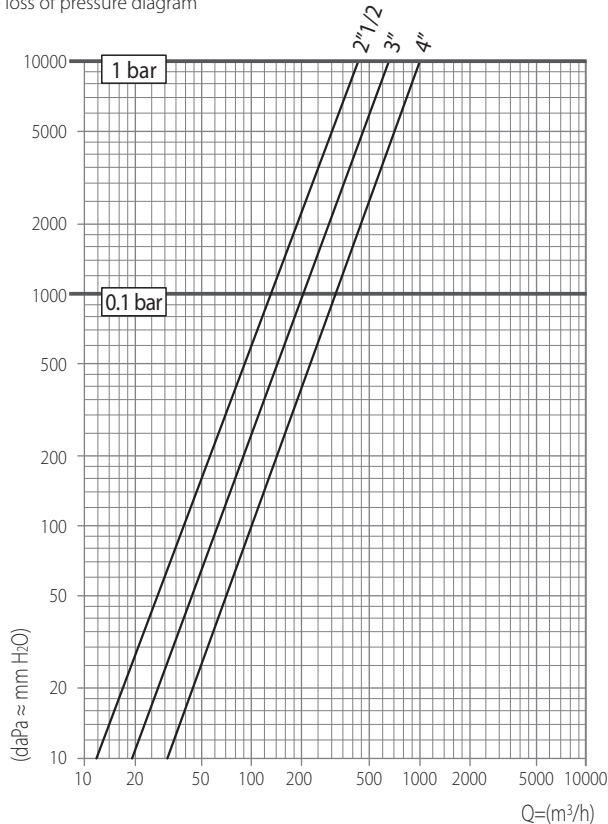

Struttura in bronzo
Bronze body

Guarnizioni in neoprene
Neoprene gaskets

Viti in acciaio inox
Stainless steel screws

Volantino in termoplastico
Thermoplastic handwheel

G	0.1 bar	1 bar
2"1/2	135800	429500
3"	207700	656700
4"	324500	1026100

Portate di acqua - lt/h
Flow-rate capacity - lt/h