


2300

Valvola a sfera F-F
passaggio totale a leva
Lever operated ball
valve F-F full flow

RINA type approval
ISO 9093:2020

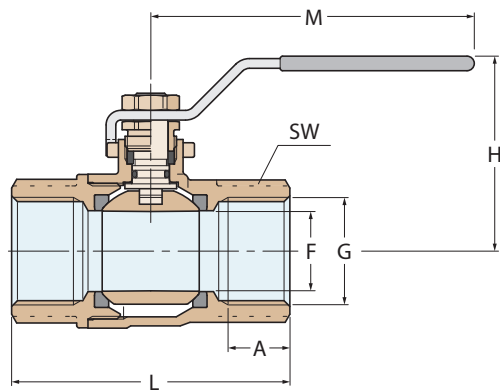


FILETTATURE / THREAD :
G = EN 10226/1 (BS 21)

2300									
Weight (gr)	190	280	390	600	990	1200	2000	3700	5860
SW	22	26	32	41	50	55	69	84	98
M	78	78	98	98	128	128	158	158	240
H	48	49	56	60	72	77	88	105	178
L	54	65	72	86	99	107	128	157	177
F	12	14.8	19.5	24.5	31.5	38.5	48	65	78
A	11.4	15	16.3	19.1	21.4	21.4	25.7	30.2	33.3
G	3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"

Bronzo
Bronze

Diagramma portate - perdite di carico
Flow rate - loss of pressure diagram

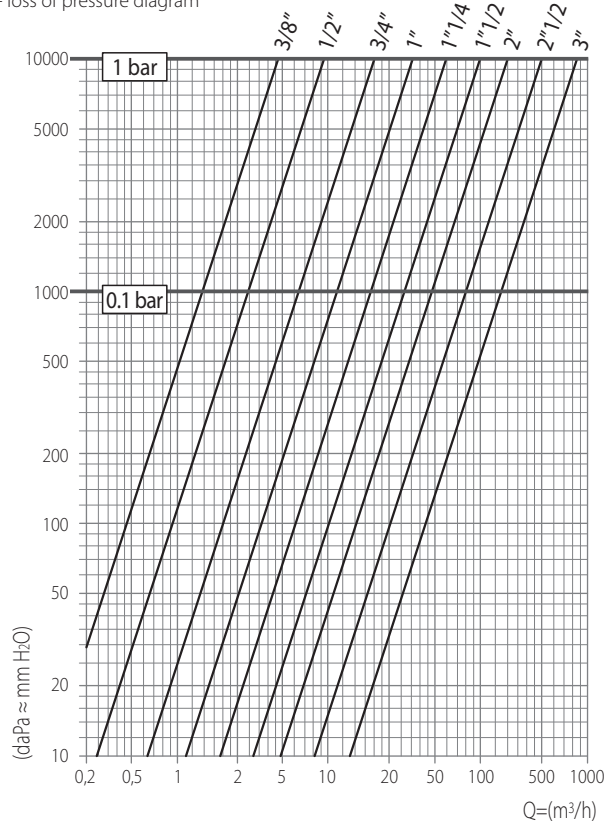

- Corpo e manicotto in Bronzo CC499K
Bronze CC499K body and cap
- Seggi e rondella premistoppa in PTFE
PTFE seals and anti-friction ring
- O-ring in EPDM
EPDM O-ring
- Asta in Ottone CW625
Brass CW625 rod
- Sfera in ottone rivestito con trattamento ecocompatibile
resistente alla corrosione
Brass Ball
- Leva e dado in acciaio inox 304
Stainless steel 304 lever and nut

G	1 bar
3/8"	9000
1/2"	18000
3/4"	39000
1"	71000
1 1/4"	119000
1 1/2"	196000
2"	300000
2 1/2"	500000
3"	850000

Portate di acqua - lt/h
Flow-rate capacity - lt/h