


Refer to the installation manual for installation instructions!
According to ABYC recommendations all hose connections
must be fitted with two hose clamps
Maximum torque hose clamps: 6.0Nm / 54 InLbs

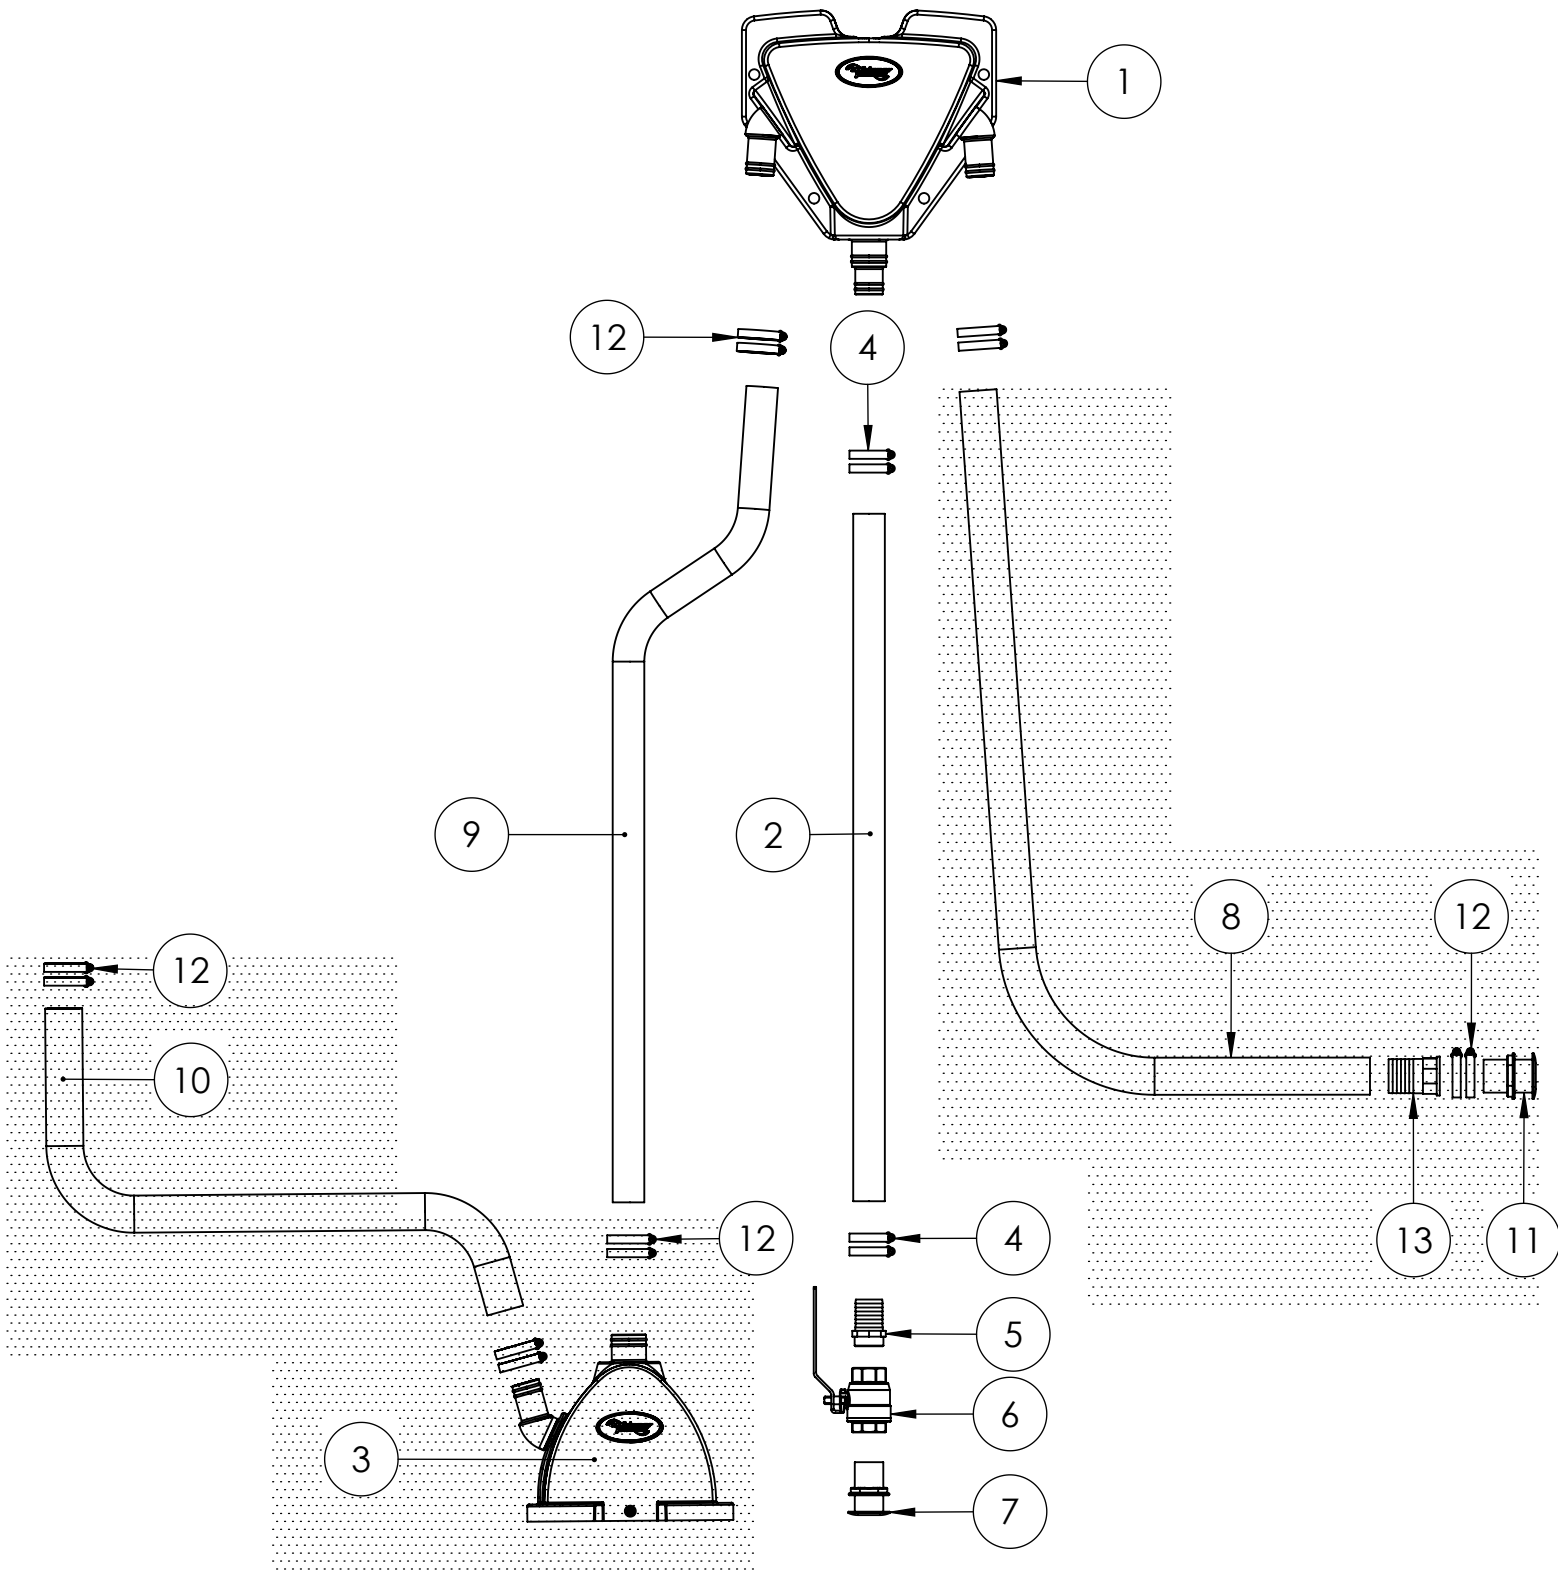


13	1	Female hose connection 1 1 2 x 50	50221024	50221024
12	12	Slangklem RVS 40 - 60	50221505	50221505
11	1	Brass through hull fitting 1 1-2 x 50	1013A173953	50230034
10	1	Marine exhaust hose 51 mm	1013P173949	50220035
9	1	Marine exhaust hose 51 mm (1 5-8 inch)	1013P173948	50220035
8	1	Marine exhaust hose 51 mm	1013P173947	50220035
7	1	Brass through hull fitting 1 1-4 x 70	1013A173923	50230033
6	1	Lever operated ball valve FF 1 1-4	50230044	50230044
5	1	Slangtule Buitendraad 1 1/4"x 40	50221015	50221015
4	4	Slangklem RVS 32 - 50	50221504 Slangklem RVS 32-50	50221504
3	1	WP-WL 51-51 Waterlock	1013A173943	40230084
2	1	Marine exhaust hose 40 mm (1 5-8 inch)	1013P173921	50220033
1	1	Water Gas Seperator Assy 51-40-51	1013A173946	40230088
ITEM NO.	QTY.	DESCRIPTION	DRAWING	ARTICLE No.

UNLESS OTHERWISE SPECIFIED:
CHAMFER SHARP EDGES
GENERAL TOLERANCE
NEN ISO 2768-m
FORM AND PLACE TOLERANCES
NEN-ISO 1101
WELDING SYMBOL NEN EN 22553
ROUGHNESS ACC. to NEN3634

TOLERANCE PRINCEPE
ISO 8015

PROJECTION : THIRD ANGLE
UNITS : mm



FINISH:
-

Material:

DO NOT SCALE DRAWING
SHEET FORMAT:
A3
TITLE:



WP-WGS 51 mm Kit

		Article no
Contents of the delivery	Pos 1 (1x), 4 (4x), 12 (4x), 9 (2,5m), 2 (2.5m), 5 (1x), 6 (1x), 7 (1x)	40230292 (Total Delta/gas separator kit 51 mm)
Optional installation materials	Pos 12 (8x), 10 & 8 (Total 3m), 3 (1x), 11 (1x), 13(1x)	40230282 (Waterlock kit 51 mm)

DRAWN	M.B.	SIGNATURE	DATE	STATUS:	Released	ARTICLE NO.	REVISION
CHK'D	M.F.		24-5-2017			40330292	
			12-06-2017				
PRINTED			22-6-2017				
				Weight: 9362,37 gram		SCALE:1:11	SHEET 2 OF 2